
Features and Benefits

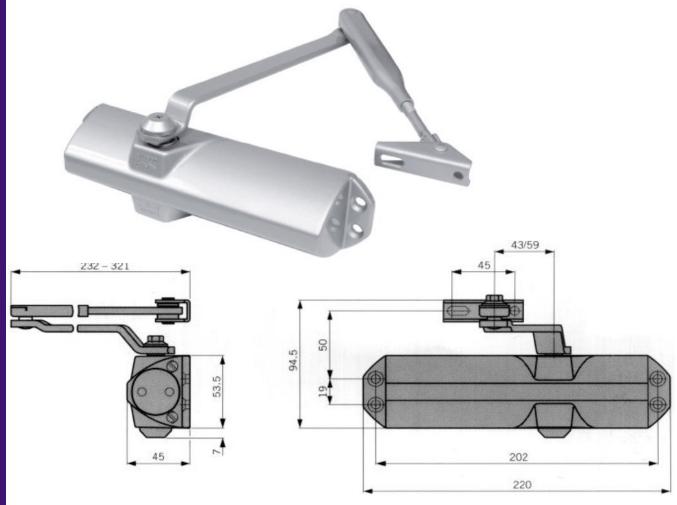

Data and features		TS 68
Selectable closing force (variable via arm power shoe and templating)	Size	EN 2/3/4
Door width	$\leq 1100 \text{ mm}$	•
External doors, outward opening		-
Non-handed		•
Arm	Slimline	•
	Slide channel	-
Closing speed adjustable via 2 independent valves	180° – 15° 15° – 0°	•
Backcheck		_
Delayed action		-
Hold-open		0
Weight in kg		1.4
Dimensions in mm	Length Overall depth Height	220 45 53.5

The DORMA TS 68, is particularly quick and easy to Install on all common door types - and does not-require a mounting backplate.

The closer arm's power shoe and changes in templating allow easy selection of the closing force to suit various door sizes.

- Non-handed
- * Suitable for standard, parallel arm and frame installation
- Single Unit Covers EN 2, 3 and 4
- Adjustable closing speed in two independent ranges
- * Optional hold-open function
- * DIN ISO 9001
- * EN 29001
- * BS 5750



Window & Door Accessories Ltd.

Richmond House, Newtown Avenue, Malahide Road Industrial Park, Dublin 17

Tel: 01-8670011 Fax: 01-8670011 Email: info@wdacc.ie Web: www.wdacc.ie